



Patent application no : 2-2000-0002

ATLANTA'S

new trend

infen

c i n g





ADVANTAGES

Atlanta Industries Incorporated introduces the Classique PVC Fence systems available fo a wide range of commercial, residential and industrial applications.

Made from durable polyvinylchloride (PVC) Classique Fence is durable and long lasting.

This new system is recommended in the Philippines specially for residential and commercial use.

Designed to prevent rust caused by salty air in coastal areas, sulfuric acid near volcanoes and polluted air near high density areas.

Classique will enhance the value of your property because this revolutionary method requires little or no maintenance normally experienced with conventional wood-type or iron fencing.

The panels are easy to install using the notching tool for the locking tab method, or by securing profiles with a retaining screw.








EXTRUDED PVC FENCING PROFILE


Profile Dimensions (Cross Section) Posts	Normal Wall Thickness	Code
4.00" X 4.00"	4.0 mm	PS - 4
Profile Dimensions (Cross Section) Posts	Normal Wall Thickness	Code

Profile Dimensions (Cross Section) Posts	Normal Wall Thickness	Code
.750" X .750"	1.8 mm	PK - 7515













PICKET


Dimensions:

A. Rail: 1 - 3/4" x 1 - 3/4" x 6'

B. Post: 4"x 4"x 7"

C. Picket: 3/4" x 1 - 1/2" x 4"

D. Pyramid Post Cap: 4" x 4"






RANCH RAIL


Dimensions:

A. Rail: 5 - 1/2" x 1 - 1/2" x 8'

B. Post: 4"x 4"x 7"

C. Pyramid Post Cap: 4" x 4"



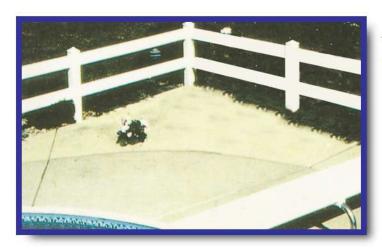


LAWN RAIL

Dimensions:

A. Rail: 5 - 1/2" x 1 - 1/2" x 8'

B. Post: 4"x 4"x 6"

C. Pyramid Post Cap: 4" x 4"





PVC vs WOOD

Lifetime Warranty Lifetime Warranty 50+ Years YES YES	No Warranty None Included 10-15 Years NO NO
50+ Years YES YES	10-15 Years NO
YES YES	NO
YES	N. August
275	NO
10.000	
YES	NO
YES	NO
YES	NO
Never	YES
YES	NO
	YES Never

	Property	Test Method	Value
Specific	Gravity (+/-0.02)	ASTM D792	1.46
Using 0.	012 specimen: Izod impact ft. lbs./in. notch	ASTM D256	17.0
Tensile Y	ield Strength, PSI	ASTM D638	6.290
Tensile A	Modulus, PSI	ASTM D638	430,000
Flexural	Yield Strength, PSI	ASTM D790	12,000
Flexural	Modulus, PSI	ASTM D790	410,000
DTUL at	264, PSI	ASTM D648	67°C
ASTM C	ell Classification	ASTM D4216	1-40131-13-0101

ADVANTAGES:

- Corrosion-free
- Rot-free
- Maintenace-free
- Lightweight (easy to install)Cost-efficient

PVC FENCING is available in:



NOTE: Fences are supplied unassembled.

Another quality product of:

ATLANTA INDUSTRIES, INC.

35th Floor Atlanta Centre #31 Annapolis St., Greenhills,

San Juan City, Philippines

Tel. nos.: 723-0781 to 96 / 744-4700 to 05

Fax nos.: 722-8705/744-4703 Website: http://www.atlanta.ph

Email: atlanta@atlanta.ph

